



OPK SERIES PUSH-IN CONNECTION RAIL TERMINAL BLOCKS


Technical Features ;

- Push-in System
- Does not require final plate (Both sides are closed), provides cost saving and better isolation
- Symmetrical (Mountable to rail on both directions)
- Lower cable thrust
- Time and cost saving
- Reducing transmission, zero contact by means of orange buttons
- Springs are stainless steel
- Opportunity to assemble cable with ferrule of 0,50 mm² to 35 mm² without any hand tool requirement
- Labelling system appropriate for strap marking
- Double sided bridging opportunity
- Isolated comb bridge


Range of Products;

- OPK Series standard terminal blocks
- OPK Series earth rail terminal blocks
- OPK Series double rail terminal blocks
- OPK Series triple rail terminal blocks
- OPK Series 1 in 2 out terminal blocks
- OPK Series 2 in 2 out terminal blocks
- OPK Series 2 in 2 out knife disconnect terminal blocks
- OPK Series fused terminal blocks
- MRK and OPK Series stoppers
- OPK Series separation plate
- OPK Series Cross connections


OPK SERIES




- The roll labelling system can be used in all of 2,5 - 4 - 6 and 10 mm² push-in terminal blocks




- It can be easily measured within the holes



- It can be tested by touching the test probes from two different points over the terminal blocks without ejecting the fuse



- OPK fuse terminal block terminals have a nest in order to keep an extra glass fuse

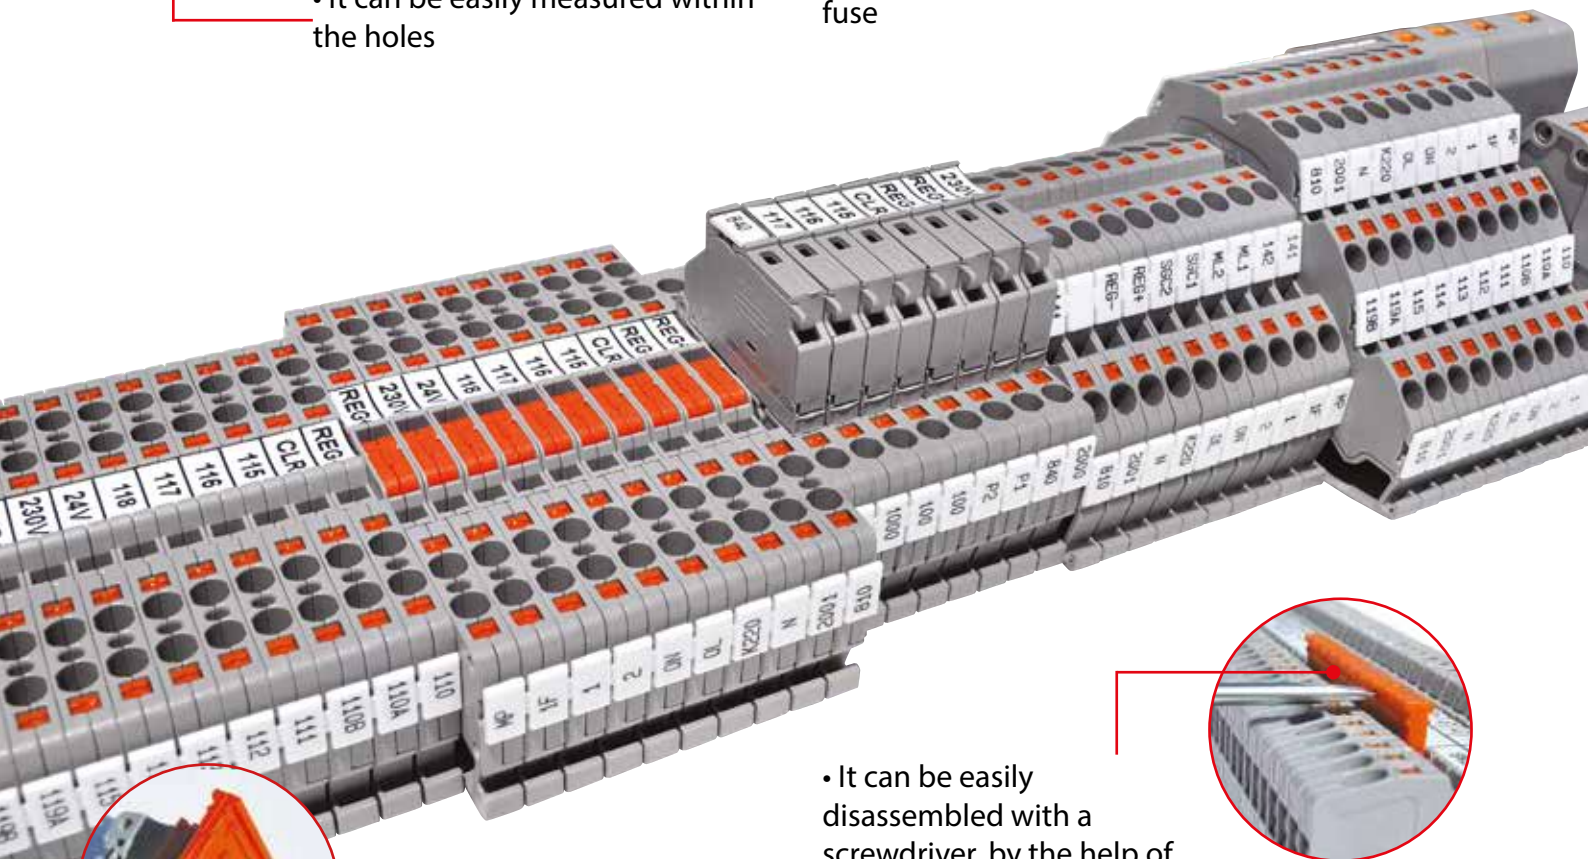

- Continuous and safe contact from four points due to the diagonal structure of the pins



- It can be easily disassembled with a screwdriver, by the help of the notch over the bridge



- Due to the channels on the comb bridge, it gives the chance to be cut from the center of the pin gap. This feature is valid with 10 and 20 pin bridges



OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS



OPK 1,5

New Code: 1020002

Old Code: 1592

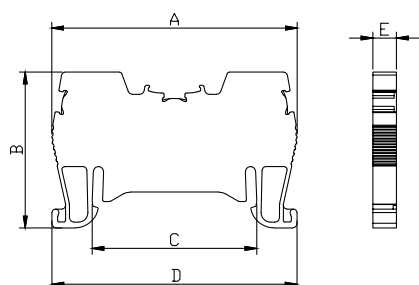

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	5,0

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	17,5 A
Section	1,5 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020002	1592	1020074	0532	100
CREAM	1020003	1593	1020075	0533	100
BLACK	1020004	1594	1020076	0534	100
BLUE	1020005	1595	1020077	0535	100
BROWN	1020006	1596	1020078	0536	100
RED	1020007	1597	1020079	0537	100
YELLOW	1020008	1598	1020080	0538	100
GREEN	1020009	1599	1020081	0539	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060101	1920	1,5 / 2	100	Pg. 58
	1060102	1921	1,5 / 3	100	Pg. 58
	1060103	1922	1,5 / 4	100	Pg. 58
	1060104	1923	1,5 / 10	30	Pg. 58
	1060105	1924	1,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING



	New Code	Old Code	See Page
Dekafix	1060198	5443	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175
Roll Label	-	8943-S11	Pg. 169



OPK 2,5

New Code: 1020013

Old Code: 1502

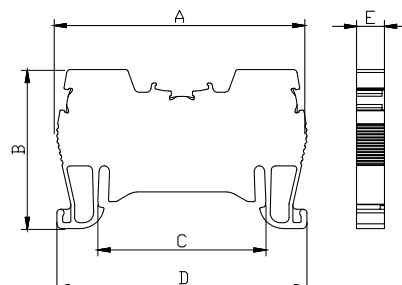

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	5,8

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	20 A
Section	2,5 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020013	1502	1020083	0922	100
CREAM	1020014	1503			100
BLACK	1020015	1504	1020084	0924	100
BLUE	1020016	1505	1020085	0925	100
BROWN	1020017	1506	1020086	0926	100
RED	1020018	1507	1020087	0927	100
YELLOW	1020019	1508			100
GREEN	1020020	1509	1020088	0929	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING



	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS

**OPK 4**

New Code: 1020024

Old Code: 1512

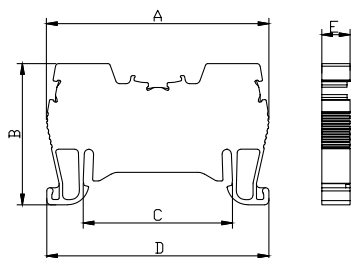

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	6,6

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	32 A	26 A
Section	4,0 mm ²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020024	1512	1020090	0932	100
CREAM	1020025	1513			100
BLACK	1020026	1514	1020091	0934	100
BLUE	1020027	1515	1020092	0935	100
BROWN	1020028	1516	1020093	0936	100
RED	1020029	1517	1020094	0937	100
YELLOW	1020030	1518			100
GREEN	1020031	1519	1020095	0939	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57



MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169

**OPK 6**

New Code: 1020034

Old Code: 1522

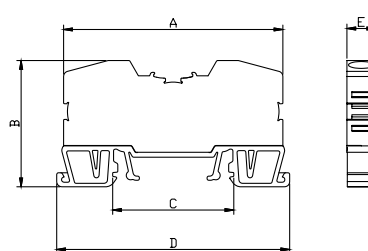

Dimension (mm)	A	B	C	D	E
	62,5	36,0	34,5	66,4	8,2

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	12 mm

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6,0 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020034	1522	1020096	0942	100
CREAM	1020035	1523			100
BLACK	1020036	1524			100
BLUE	1020037	1525			100
BROWN	1020038	1526			100
RED	1020039	1527			100
YELLOW	1020040	1528			100
GREEN	1020041	1529			100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060127	1945	6 / 2	100	Pg. 58
	1060128	1946	6 / 3	50	Pg. 58
	1060129	1947	6 / 4	50	Pg. 58
	1060130	1948	6 / 10	15	Pg. 58
	1060131	1949	6 / 20	10	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57



MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS



OPK 10
New Code: 1020044
Old Code: 1532

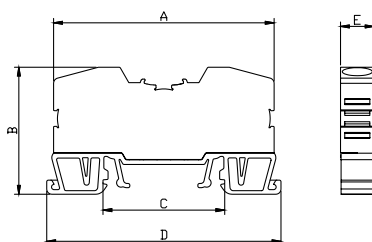

Dimension (mm)	A	B	C	D	E
	62,5	36,0	34,5	66,4	9,5

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	12 mm

DATA	TSE / CE
Voltage	750 V
Current	57 A
Section	10 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020044	1532	1020097	0952	100
CREAM	1020045	1533			100
BLACK	1020046	1534			100
BLUE	1020047	1535			100
BROWN	1020048	1536			100
RED	1020049	1537			100
YELLOW	1020050	1538			100
GREEN	1020051	1539			100

ACCESSORIES



Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060132	1950	10 / 2	100	Pg. 58
	1060133	1951	10 / 3	50	Pg. 58
	1060134	1952	10 / 4	50	Pg. 58
	1060135	1953	10 / 10	15	Pg. 58
	1060136	1954	10 / 20	10	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169



OPK 16
New Code: 1020054
Old Code: 1542

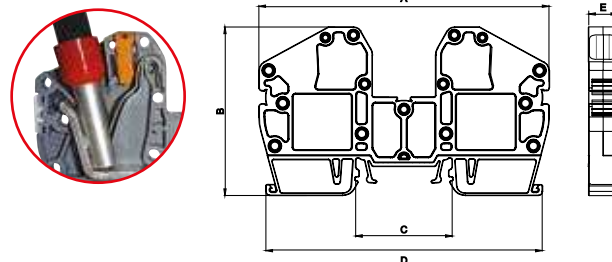

Dimension (mm)	A	B	C	D	E
	103,0	60,0	34,5	98,0	10,7

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	22 mm

DATA	TSE / CE
Voltage	750 V
Current	76 A
Section	16 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020054	1542	1020098	0962	30
CREAM	1020055	1543			30
BLACK	1020056	1544			30
BLUE	1020057	1545			30
BROWN	1020058	1546			30
RED	1020059	1547			30
YELLOW	1020060	1548			30
GREEN	1020061	1549			30

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060136	1955	16 / 2	10	Pg. 58
	1060137	1956	16 / 3	10	Pg. 58
	1060138	1957	16 / 4	10	Pg. 58
	1060139	1958	16 / 10	10	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177



OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS



OPK 35

New Code: 1020064

Old Code: 1552

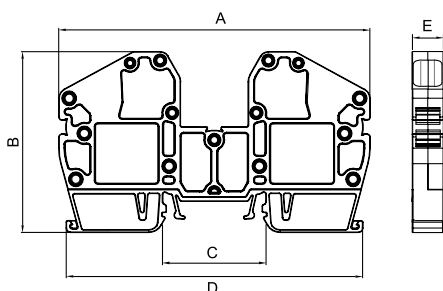

Dimension (mm)	A	B	C	D	E
	103,0	60,0	34,5	98,0	15,2

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	22 mm

DATA	TSE / CE
Voltage	750 V
Current	125 A
Section	35 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020064	1552	1020099	0972	20
CREAM	1020065	1553			20
BLACK	1020066	1554			20
BLUE	1020067	1555			20
BROWN	1020068	1556			20
RED	1020069	1557			20
YELLOW	1020070	1558			20
GREEN	1020071	1559			20

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060140	1959	35 / 2	10	Pg. 58
	1060141	1960	35 / 3	10	Pg. 58
	1060142	1961	35 / 4	10	Pg. 58
	1060143	1962	35 / 10	10	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177



OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS



OPK - C 2,5

New Code: 1020379

Old Code: 1722

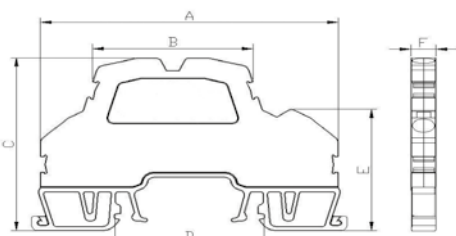

Dimensions (mm)	A	B	C	D	E	F
	69,0	37,0	50,0	34,5	35,5	5,9

MATERIAL


Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	24 A	16 A
Section	2,5 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	New Code	Old Code	Pcs.
GREY	1020379	1722	50
CREAM	1020380	1723	50
BLACK	1020381	1724	50
BLUE	1020382	1725	50
BROWN	1020383	1726	50
RED	1020384	1727	50
YELLOW	1020385	1728	50
GREEN	1020386	1729	50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020388	1732			
Diode	1020397	1742			

MARKING



	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK - C 4

New Code: 1020406

Old Code: 1752

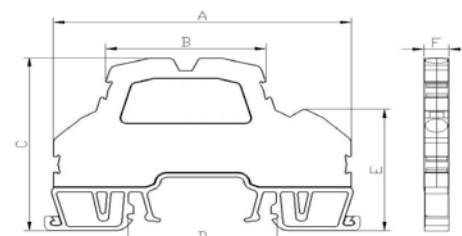

Dimensions (mm)	A	B	C	D	E	F
	69,0	37,0	50,0	34,5	35,5	6,7

MATERIAL


Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4,0 mm ²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	New Code	Old Code	Pcs.
GREY	1020406	1752	50
CREAM	1020407	1753	50
BLACK	1020408	1754	50
BLUE	1020409	1755	50
BROWN	1020410	1756	50
RED	1020411	1757	50
YELLOW	1020412	1758	50
GREEN	1020413	1759	50


ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
	1060002	1202		100	Pg. 56
Stopper	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020415	1762			
Diode	1020424	1772			



MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS



OPK - D 2,5
Code: 1020441

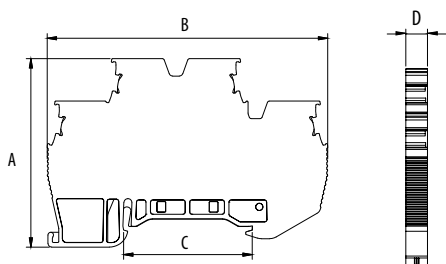

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	5,8

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	24 A
Section	2,5 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS


COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020441	1020468	50
CREAM	1020442	1020469	50
BLACK	1020443	1020470	50
BLUE	1020444	1020471	50
BROWN	1020445	1020472	50
RED	1020446	1020473	50
YELLOW	1020447	1020474	50
GREEN	1020448	1020475	50

ACCESSORIES



Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK - D 2,5
Code: 1020450
Bridged

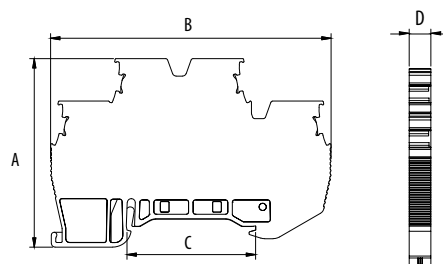

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	5,8

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	24 A
Section	2,5 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020450	1020477	50
CREAM	1020451	1020478	50
BLACK	1020452	1020479	50
BLUE	1020453	1020480	50
BROWN	1020454	1020481	50
RED	1020455	1020482	50
YELLOW	1020456	1020483	50
GREEN	1020457	1020484	50


ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS



OPK - D 2,5

Code: 1020459

Diode

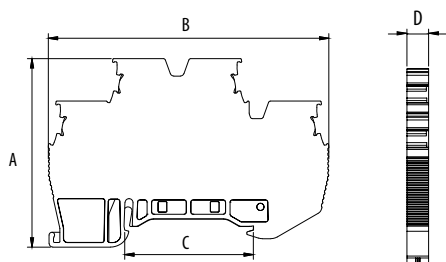

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	5,8

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	1A	1A
Section	2,5 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020459	1020486	50
CREAM	1020460	1020487	50
BLACK	1020461	1020488	50
BLUE	1020462	1020489	50
BROWN	1020463	1020490	50
RED	1020464	1020491	50
YELLOW	1020465	1020492	50
GREEN	1020466	1020493	50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57



MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK - D 4

Code: 1020495

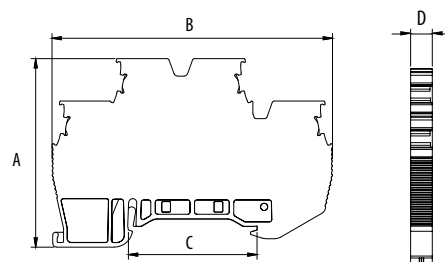

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020495	1020522	50
CREAM	1020496	1020523	50
BLACK	1020497	1020524	50
BLUE	1020498	1020525	50
BROWN	1020499	1020526	50
RED	1020500	1020527	50
YELLOW	1020501	1020528	50
GREEN	1020502	1020529	50


ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING



	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS



OPK - D 4

Code: 1020504
Bridged

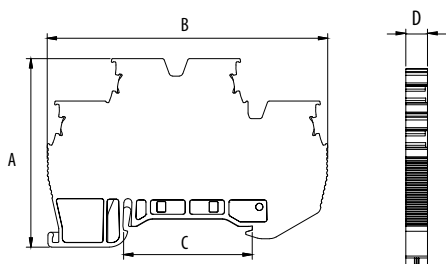

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS


COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020504	1020531	50
CREAM	1020505	1020532	50
BLACK	1020506	1020533	50
BLUE	1020507	1020534	50
BROWN	1020508	1020535	50
RED	1020509	1020536	50
YELLOW	1020510	1020537	50
GREEN	1020511	1020538	50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57



MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169



OPK - D 4

Code: 1020513
Diode

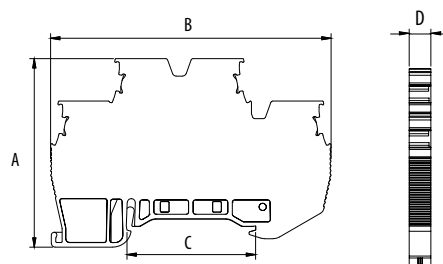

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	1A	1A
Section	4 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020513	1020540	50
CREAM	1020514	1020541	50
BLACK	1020515	1020542	50
BLUE	1020516	1020543	50
BROWN	1020517	1020544	50
RED	1020518	1020545	50
YELLOW	1020519	1020546	50
GREEN	1020520	1020547	50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING



	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS



OPK - D 2,5 EARTH

Code: 1020432

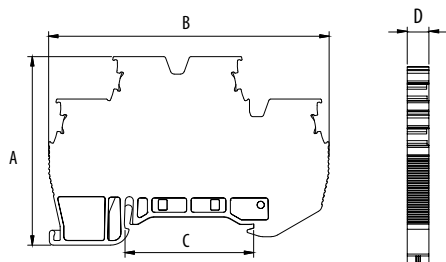

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020432	1020434	50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
	1060002	1202		100	Pg. 56
Stopper	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
	1060024	1232		100	Pg. 57
Bridged	1020433				



MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK - D 4 EARTH

Code: 1020436

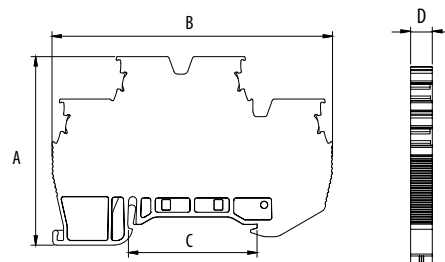

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020436	1020438	50


ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
	1060002	1202		100	Pg. 56
Stopper	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
	1060024	1232		100	Pg. 57
Bridged	1020437				

MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS

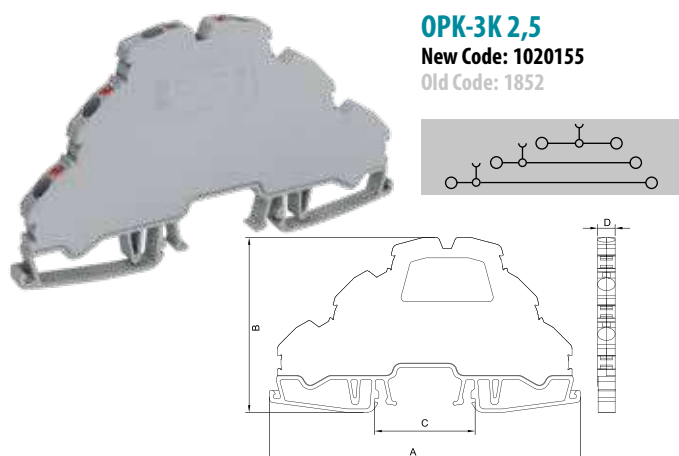**OPK-3K 2,5**

New Code: 1020155

Old Code: 1852

Dimension (mm)	A	B	C	D
	106,0	60,0	34,5	5,9

MATERIAL


Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm ²
Norm	EN-60947-7-1

COLOURS


	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020155	1852	1020216	0682	50
CREAM	1020156	1853			50
BLACK	1020157	1854			50
BLUE	1020158	1855			50
BROWN	1020159	1856			50
RED	1020160	1857			50
YELLOW	1020161	1858			50
GREEN	1020162	1859			50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
	1060002	1202		100	Pg. 56
Stopper	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020164	1862			

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

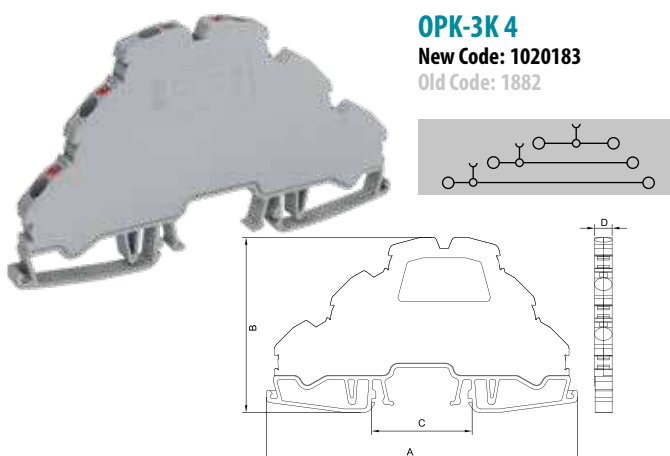**OPK-3K 4**

New Code: 1020183

Old Code: 1882

Dimension (mm)	A	B	C	D
	106,0	60,0	34,5	6,7

MATERIAL


Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	32 A
Section	4 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020183	1882	1020217	0683	50
CREAM	1020184	1883			50
BLACK	1020185	1884			50
BLUE	1020186	1885			50
BROWN	1020187	1886			50
RED	1020188	1887			50
YELLOW	1020189	1888			50
GREEN	1020190	1889			50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
	1060002	1202		100	Pg. 56
Stopper	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	102192	1892			

MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169



OPK SERIES PUSH-IN CONNECTION TRIPLE RAIL TERMINAL BLOCKS



OPK-3K 2,5 EARTH

New Code: 1020174

Old Code: 1872

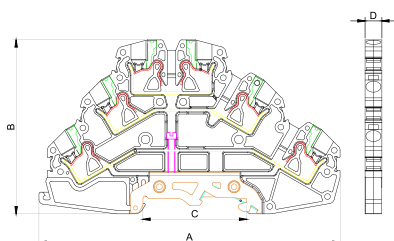

Dimension (mm)	A	B	C	D
	106,0	60,0	34,5	5,9

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020174	1872	1020219	0672	50
CREAM	1020175	1873			50
BLACK	1020176	1874			50
BLUE	1020177	1875			50
BROWN	1020178	1876			50
RED	1020179	1877			50
YELLOW	1020180	1878			50
GREEN	1020181	1879			50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING



	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176



OPK-3K 4 EARTH

New Code: 1020201

Old Code: 1902

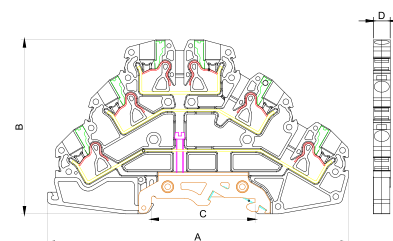

Dimension (mm)	A	B	C	D
	106,0	60,0	34,5	6,7

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	32A
Section	4 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020201	1902	1020220	0412	50
CREAM	1020202	1903			50
BLACK	1020203	1904			50
BLUE	1020204	1905			50
BROWN	1020205	1906			50
RED	1020206	1907			50
YELLOW	1020207	1908			50
GREEN	1020208	1909			50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING


	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177

OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS

**OPK - 1IN / 20UT - 2,5**



New Code: 1020285

Old Code: 1262

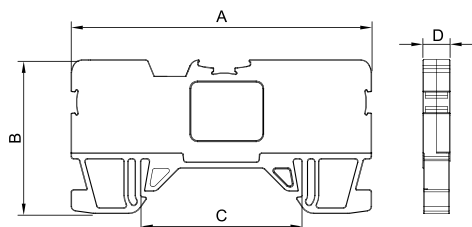**OPK - 2IN / 20UT - 2,5**

New Code: 1020275

Old Code: 1252

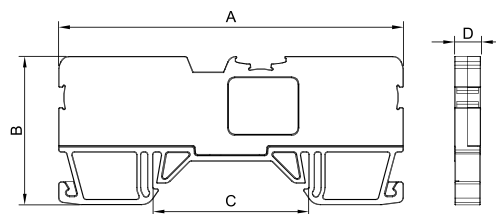

Dimension (mm)	A	B	C	D
	64,8	33,0	34,5	5,9

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020285	1262	1020295	0662	50
CREAM	1020286	1263			50
BLACK	1020287	1264			50
BLUE	1020288	1265	1020296	0665	50
BROWN	1020289	1266			50
RED	1020290	1267	1020297	0667	50
YELLOW	1020291	1268			50
GREEN	1020292	1269			50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

Dimension (mm)	A	B	C	D
	77,3	33,3	34,5	5,9

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020275	1252	1020294	0652	50
CREAM	1020276	1253			50
BLACK	1020277	1254			50
BLUE	1020278	1255			50
BROWN	1020279	1256			50
RED	1020280	1257			50
YELLOW	1020281	1258			50
GREEN	1020282	1259			50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK SERIES PUSH-IN TEST TERMINAL BLOCKS



OPK - 2IN/20UT - 2,5

New Code: 1020265

Old Code: 1242

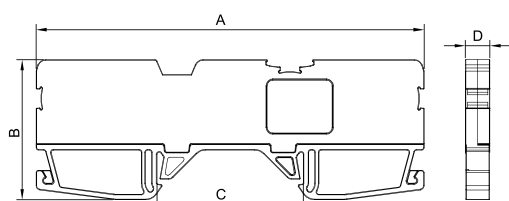

Dimension (mm)	A	B	C	D
	91,8	33,0	34,5	5,9
MATERIAL				
Body	PA6.6	Spring	Stainless Steel	
Bridge	Copper	Temp.	-40 °C, +140 °C	
Orange Button	PA6.6	Cable Strip L.	9 mm	
DATA	TSE / CE			
Voltage	750 V			
Current	24 A			
Section	2,5 mm ²			
Norm	EN-60947-7-1			

COLOURS					
	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020265	1242	1020293	0642	50
CREAM	1020266	1243			50
BLACK	1020267	1244			50
BLUE	1020268	1245			50
BROWN	1020269	1246			50
RED	1020270	1247			50
YELLOW	1020271	1248			50
GREEN	1020272	1249			50

ACCESSORIES					
Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING			
	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK SERIES PUSH-IN FUSED TERMINAL BLOCKS



OPK - S 2,5

New Code: 1020223

Old Code: 2482

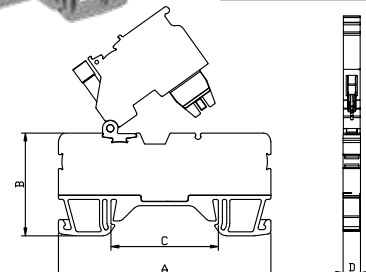


Dimension (mm)	A	B	C	D
	68,3	33,0	34,5	5,9
MATERIAL				
Body	PA6.6	Spring	Stainless Steel	
Bridge	Copper	Temp.	-40 °C, +140 °C	
Orange Button	PA6.6	Cable Strip L.	9 mm	
DATA	TSE / CEw			
Voltage	750 V	Section	2,5 mm²	
Current	6.3 A	Norm	EN-60947-7-1	

COLOURS				VOLTAGE		
	V2	V2		Volt	New Code	Old Code
COLOUR	New Code	Old Code	Pcs.	Empty	1020223	2482
GREY	1020223	2482	50	Bar	1020232	2492
CREAM	1020224	2483	50	12 V AC/DC LED	1020236	2502
BLACK	1020225	2484	50	24 V AC/DC LED	1020245	2512
BLUE	1020226	2485	50	48 V AC/DC LED	1020254	2532
BROWN	1020227	2486	50	110 V AC/DC LED	1020256	2552
RED	1020228	2487	50	220 V AC/DC LED	1020258	2562
YELLOW	1020229	2488	50			
GREEN	1020230	2489	50			

ACCESSORIES					
Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Glass Fuse	WE-FS-52	-		100	-
5x20 mm Glass Fuse (0.2.....10A Please inform amp.)					




MARKING			
	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176

OPK SERIES PUSH-IN CONNECTION EARTH RAIL TERMINAL BLOCKS

**OTK - 4**


New Code: 1020299

Old Code: 1199

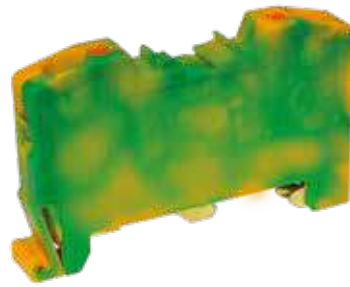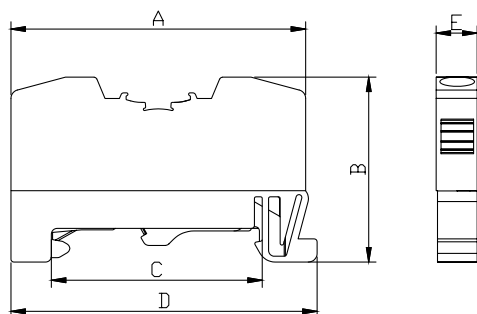**OTK - 10**

New Code: 1020300

Old Code: 1200

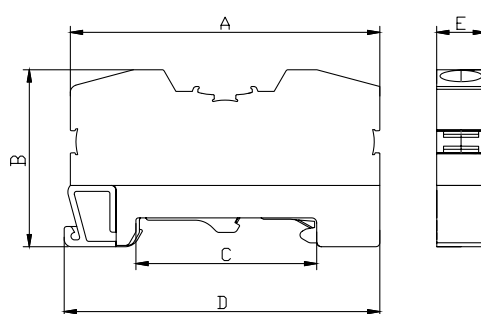

Dimension (mm)	A	B	C	D	E
	51,0	31,8	34,5	52,6	7,1

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail		Brass	

DATA	TSE / CE
Voltage	750 V
Section	4 mm ²
Norm	EN-60947-7-2

COLOURS

COLOUR	New Code	Old Code	Pcs.
CAMOUFLAGE	1020299	1199	100

ACCESSORIES

	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 56
	1060005	1212	Pg. 57
	1060014	1222	Pg. 56
Group Sticker	1060024	1232	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169

Dimension (mm)	A	B	C	D	E
	62,5	36,5	34,5	64,5	10,0

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	12 mm
The Foot Which Contact to the Rail		Brass	

DATA	TSE / CE
Voltage	750 V
Section	10 mm ²
Norm	EN-60947-7-2

COLOURS

COLOUR	New Code	Old Code	Pcs.
CAMOUFLAGE	1020300	1200	100

ACCESSORIES

	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 56
	1060005	1212	Pg. 57
	1060014	1222	Pg. 56
Group Sticker	1060024	1232	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169



PUSH-IN TERMINAL BLOCK FOR PCB CONNECTION



PC-P 2,5

New Code: 1020302

Old Code: 0382

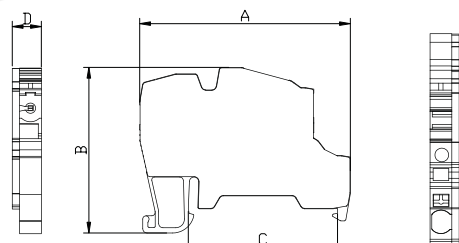

Dimension (mm)	A	B	C	D
	49,0	38,5	34,5	6,7

MATERIAL

Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 °C, +140 °C
Orange Button	PA6.6	Cable Strip L.	10 mm

DATA	TSE / CE
Voltage	500 V
Current	17,5 A
Section	2,5 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020302	0382	1020304	0322	50
CREAM		0383		0323	50
BLACK		0384		0324	50
BLUE		0385		0325	50
BROWN		0386		0326	50
RED		0387		0327	50
YELLOW		0388		0328	50
GREEN		0389		0329	50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
PCB-N End Plate	1020301	0352		10	
PCB-N End Plate (V0)	1020303	0312		10	

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

SOCKET TERMINAL FEMALE 5,08 MM



SBDK 5,08

PIN NUMBER	Blue Order No.	Green Order No.	Pcs. Box
2	10.202	11.202	200
3	10.203	11.203	100
4	10.204	11.204	100
5	10.205	11.205	100
6	10.206	11.206	100
7	10.207	11.207	100
8	10.208	11.208	100
9	10.209	11.209	100
10	10.210	11.210	50
11	10.211	11.211	50
12	10.212	11.212	50


MRK AND OPK SERIES SCREWLESS STOPPER



Screwless Stopper

New Code: 1060002

Old Code: 1202

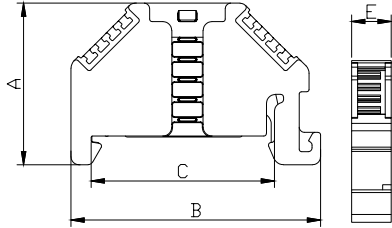

Dimension (mm)	A	B	C	D
	30,7	47,4	34,5	7,5

MATERIAL

Body	PA	Temp.	-40 °C, +140 °C
Screw	Stainless Steel	Pcs	100

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177


MRK AND OPK SERIES MINI STOPPER



Mini Stopper

New Code: 1060014

Old Code: 1222

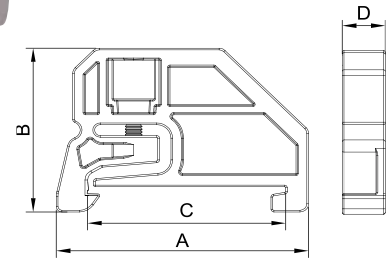

Dimension (mm)	A	B	C	D
	43,0	30,0	34,5	7,5

MATERIAL

Body	PA	Temp.	-40 °C, +140 °C
Screw	Steel	Pcs	100

MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177


OPK SERIES SEPARATION PLATE



OPK Series Separation Plate

New Code: 1060053

Old Code: 0592

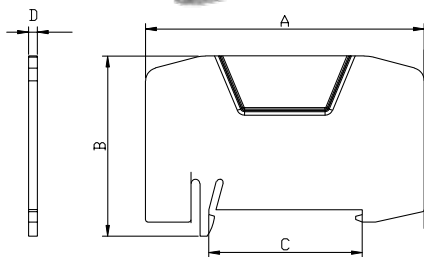

Dimension (mm)	A	B	C	D
	63,5	41,3	34,5	2,0


MATERIAL

Body	PA	Temp.	-40 °C, +140 °C
Pcs	25		

COLOURS

COLOUR	New Code	Old Code	Pcs.
GREY	1060053	0592	25
RED	1060054	0597	25


MRK AND OPK SERIES SEPARATION PLATE



HIGH TYPE

Separation Plate

Code: 0999

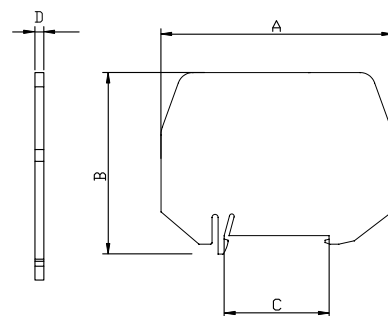

Dimension (mm)	A	B	C	D
	76,0	60,0	34,5	0,7


MATERIAL

Body	PET (FF)	Temp.	-40 °C, +140 °C
Pcs	25		

MRK AND OPK SERIES BIG STOPPER



Big Stopper
New Code: 1060005
Old Code: 1212

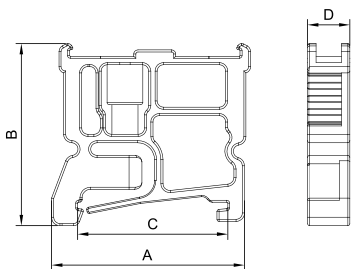

Dimension (mm)	A	B	C	D
	44,6	43,5	34,5	9,8

MATERIAL

Body	PA	Temp.	-40 °C, +140 °C
Screw	Steel	Pcs	100


MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK AND OPK SERIES BIG STOPPER



Stopper With Group Sticker
New Code: 1060024
Old Code: 1232



Dimension (mm)	A	B	C	D
	44,6	43,5	34,5	9,8

MATERIAL

Body	PA	Temp.	-40 °C, +140 °C
Screw	Steel	Pcs	100


MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

GROUP MARKER



Group Marker
New Code: 1060093
Old Code: 1482

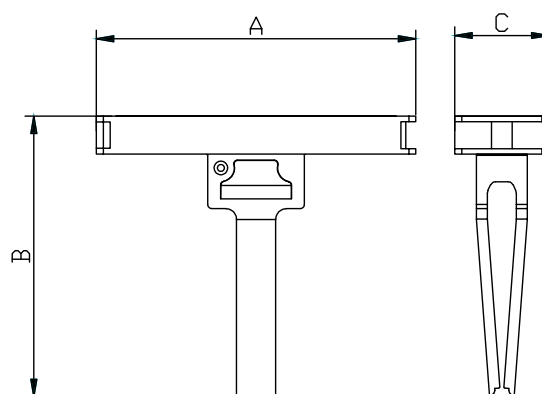

Dimension (mm)	A	B	C
	46,2	40,6	13,6

MATERIAL

Body	PC	Temp.	-40 °C, +140 °C
Pcs	100		

OPK SERIES CROSS CONNECTIONS

MATERIAL

Isolation PA 6.6

Body Brass

Covering Tin

Note: All 1,5 mm², 2,5 mm² and 4 mm² cross connections can be both used for MRK and OPK Series.

For the Slim Series, please check the relevant product accessories section.


COLOUR	NEW CODE	OLD CODE	TYPE	PCS
Orange	1060101	ONKA-1920	1.5 x 2	100
Orange	1060102	ONKA-1921	1.5 x 3	100
Orange	1060103	ONKA-1922	1.5 x 4	100
Orange	1060104	ONKA-1923	1.5 x 10	30
Orange	1060105	ONKA-1924	1.5 x 20	20
Orange	1060106	ONKA-1925	2.5 x 2	100
Orange	1060107	ONKA-1926	2.5 x 3	100
Orange	1060108	ONKA-1927	2.5 x 4	75
Orange	1060109	ONKA-1928	2.5 x 10	30
Orange	1060110	ONKA-1929	2.5 x 20	20
Orange	1060111	ONKA-1930	4 x 2	100
Orange	1060112	ONKA-1931	4 x 3	100
Orange	1060113	ONKA-1932	4 x 4	50
Orange	1060114	ONKA-1933	4 x 10	30
Orange	1060115	ONKA-1934	4 x 20	20
Red	1060126	ONKA-1945	6 x 2	100
Red	1060127	ONKA-1946	6 x 3	50
Red	1060128	ONKA-1947	6 x 4	50
Red	1060129	ONKA-1948	6 x 10	15
Red	1060130	ONKA-1949	6 x 20	10
Red	1060131	ONKA-1950	10 x 2	100
Red	1060132	ONKA-1951	10 x 3	50
Red	1060133	ONKA-1952	10 x 4	50
Red	1060134	ONKA-1953	10 x 10	15
Red	1060135	ONKA-1954	10 x 20	10
Red	1060136	ONKA-1955	16 x 2	10
Red	1060137	ONKA-1956	16 x 3	10
Red	1060138	ONKA-1957	16 x 4	10
Red	1060139	ONKA-1958	16 x 10	10
Red	1060140	ONKA-1959	35 x 2	10
Red	1060141	ONKA-1960	35 x 3	10
Red	1060142	ONKA-1961	35 x 4	10
Red	1060143	ONKA-1962	35 x 10	10

Monolithic insulated body provides high durability to the conductor busbar




Due to the channels on the comb bridge, it gives the chance to be cut from the center of the pin gap

This feature is valid with 10 and 20 pin bridges

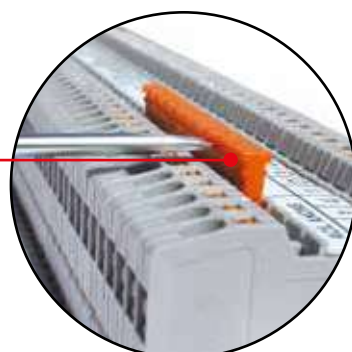

It can be easily disassembled with a screwdriver, by the help of the notch over the bridge

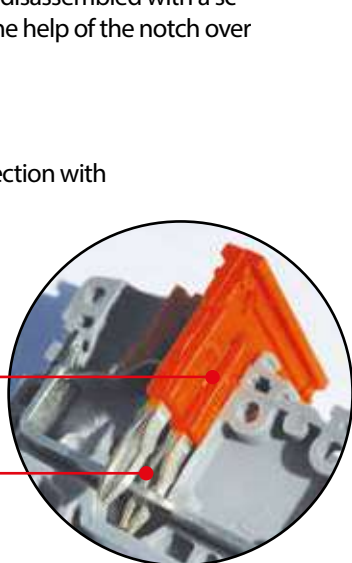

A secure connection with the bridle part

Continuous and safe contact from four points due to the diagonal structure of the pins