

## Mini-PLC

The PR200 Programmable Relay is a multifunctional and easy-to-use device designed in a plastic enclosure for DIN rail mounting as an alternative to the PLC. This mini PLC is available in several versions depending on the supply voltage (24V DC or 230V AC) and the set of built-in inputs and outputs (digital, analog, or their combination).


This device features a programmable 2-line 32-character LCD display. On option, one or two RS485 interfaces are available for implementing a Modbus communication either in Master or in Slave mode. A user-friendly programming software, akYtec ALP, is included free of charge.

### Functions and features:

- Up to built-in 8DI + 8DO + 4AI + 2AO + LCD + 2xRS485 in one device
- Configurable inputs for 4-20mA, 0-10V, 0-4000ohm (PTC, KTY thermistors, Pt1000)
- Control of the outputs according to the input status and the logic of the user application
- Configuration with the function buttons or using ALP software
- Comprehensive programming of LCD display
- 2 programmable LEDs
- Master and / or Slave in a Modbus network
- Real-time clock
- Support for various extensions

### Possible areas of application:

- Building automation
- Indoor and outdoor lighting, shop window lighting, access systems
- Technical equipment such as pumps, fans, compressors, presses
- Conveyor and filling systems

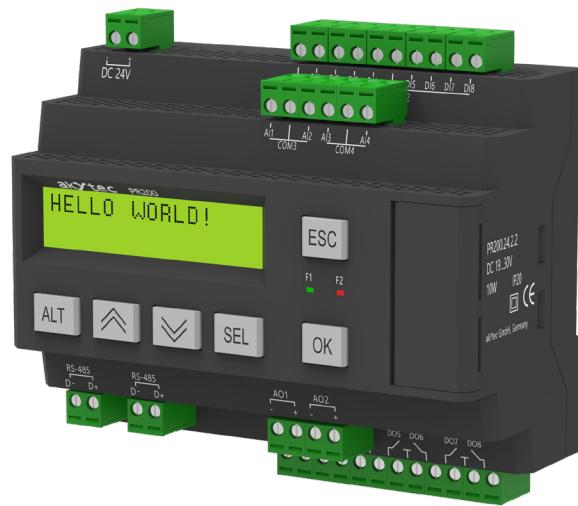

8 digital inputs

**8DI**

Up to 8 digital outputs

**8DO**

Up to 4 analog inputs

**4AI**

Up to 2 analog outputs

**2AO**

LCD display

**LCD**

Protocol Modbus RTU/ASCII

**Modbus**

Up to 2 RS485 interfaces

**RS485**

USB interface



DIN rail mounting

**DIN**

Ambient temperature

+55°C  
-20°C

**Ordering code:**

PR200 -	X	X	X
230			
24			
<b>I/O</b>			
8 DI, 6 DO	1		
8 DI, 4 AI, 8 DO, 2 AO (4-20 mA)		2	
8 DI, 4 AI, 8 DO, 2 AO (0-10 V)			4
<b>Interface</b>			
none			0
RS485			1
2x RS485			2

Standard variant	Description	Enclosure
PR200.24.1.1	24 V DC, 8DI + 6DO, LCD, 1x RS485 (Modbus RTU/ASCII)	
PR200.24.2.0	24 V DC, 8DI + 8DO + 4AI + 2AO (4-20 mA), LCD	
PR200.24.2.2	24 V DC, 8DI + 8DO + 4AI + 2AO (4-20 mA), LCD, 2x RS485 (Modbus RTU/ASCII)	
PR200.24.4.0	24 V DC, 8DI + 8DO + 4AI + 2AO (0-10 V), LCD	
PR200.24.4.2	24 V DC, 8DI + 8DO + 4AI + 2AO (0-10 V), LCD, 2x RS485 (Modbus RTU/ASCII)	
PR200.230.1.1	230 V AC, 8DI + 6DO, LCD, 1x RS485 (Modbus RTU/ASCII)	123 x 108 x 58 mm, DIN rail
PR200.230.2.0	230 V AC, 8DI + 8DO + 4AI + 2AO (4-20 mA), LCD	
PR200.230.2.2	230 V AC, 8DI + 8DO + 4AI + 2AO (4-20 mA), LCD, 2x RS485 (Modbus RTU/ASCII)	
PR200.230.4.0	230 V AC, 8DI + 8DO + 4AI + 2AO (0-10 V), LCD	
PR200.230.4.2	230 V AC, 8DI + 8DO + 4AI + 2AO (0-10 V), LCD, 2x RS485 (Modbus RTU/ASCII)	

**Technical data:**

	<b>PR200.230.1</b>	<b>PR200.230.2</b>	<b>PR200.24.1</b>	<b>PR200.24.2</b>
<b>General</b>				
Power supply	230 (90...264) V AC; 50 (47...63) Hz		24 (19...30) V DC	
Power consumption, max.	10 VA	17 VA	10 W	
Integrated voltage source	–	24±3 V DC, 100 mA	–	
	LCD with backlight, 2-line, 2x16-characters		LCD with backlight, 2-line, 2x16-characters	
Function keys	6		6	
Real-Time Clock	Backup 8 years (CR2032)		Backup 8 years (CR2032)	
Mounting	DIN rail (switchboard / distribution box)		DIN rail (switchboard / distribution box)	
Ambient temperature	-20...+55 °C		-20...+55 °C	
IP code	IP20		IP20	
Dimensions	123 x 108 x 58 mm		123 x 108 x 58 mm	
Weight	approx. 350 g		approx. 350 g	
<b>Programming</b>				
Programming environment	akYtec ALP		akYtec ALP	
Programming language	FBD		FBD	
ROM	128 kB		128 kB	
Retain memory	1016 Byte		1016 Byte	
<b>Interfaces</b>				
RS485	optional, up to 2 x		optional, up to 2 x	
Protocols	Modbus RTU / ASCII (Master / Slave)		Modbus RTU / ASCII (Master / Slave)	
Baud rate	9.6...115.2 kbit/s		9.6...115.2 kbit/s	
Programming interface	Mini-USB		Mini-USB	
<b>Digital inputs</b>				
Quantity	8		8	
Type	Switch contact		Switch contact, PNP with open collector, digital signals -3...+30 VDC	
<b>Logical states</b>				
1	159...264 V AC (0.75...1.5 mA)		15...30 V DC (5 mA)	
0	0...40 V AC (0...0.5 mA)		-3...+5 V DC (0...1 mA)	
Galvanic isolation	in groups of 4		in groups of 4	
<b>Universal inputs</b>				
Quantity	4		4	
Mode	Analog / Digital		Analog / Digital	
Galvanic isolation	none		none	
Analog input	0-10 V, 4-20 mA, 0...4 kOhm		0-10 V, 4-20 mA, 0...4 kOhm	
ADC resolution	12 bit		12 bit	
<b>Digital outputs</b>				
Quantity	6	8	6	8
Type	relay (NO)		relay (NO)	
Galvanic isolation	in groups of 2		in groups of 2	
<b>Switching capacity</b>				
AC	5 A, 250 V (resistive load)		5 A, 250 V (resistive load)	
DC	3 A, 30 V		3 A, 30 V	
Minimum load current	10 mA (at 5 V DC)		10 mA (at 5 V DC)	
<b>Analog outputs</b>				
Quantity	2		2	
Type	4-20 mA		4-20 mA	
Loading capacity	12...30 V, max. 1 kOhm		12...30 V, max. 1 kOhm	
DAC resolution	10 bit		10 bit	